Optically Coupled Isolator

OPI120, OPI123



Features:

- 15 kV electrical isolation
- Choice of phototransistor or photodarington output
- Hermetically sealed LED and photosensor
- Base contact for conventional transistor biasing (OP120 only)
- UL recognized File No. E58730*
- Wide operating temperature range

Description:

Each Optoisolator in this data sheet contains an infrared Light Emitting Diode (LED) and a NPN silicon Photosensor. The OPI120 has an 890 nm Light Emitting Diode (LED) and NPN phototransistor sensor, whereas the **OP123** has a 890 nm LED and a photodarlington sensor. The devices are sealed in a precast opaque housing

The Optoisolators in this data sheet are UL approved under E 58730.

with a optically transmissive path between the LED and the photosensor.

This series is designed for transmission of information between one power supply voltage to another where the potentials during surge conditions are not greater than the guaranteed isolation voltage.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

TX and TXV processing is available. For more information, contact your local representative or OPTEK.

Applications:

- High voltage isolation between input and output
- Electrical isolation in dirty environments
- Industrial equipment
- Medical equipment
- Office equipment

	Ordering Information											
Part Number	LED Peak Wavelength	Sensor	Isolation Voltage (,000)	CTR Min	I _F (mA) Typ / Max	V _{ce} (Volts) Max	Lead Length / Spacing					
OPI120	890 nm	Transistor	15	20	10 / 50	25	0.40" /					
OPI123	or 935 nm	Darlington	15	50	10 / 50	20	0.75"					



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc. 1645 Wallace Drive, Carrollton, TX 75006 Ph: +1 972 323 2200 sensors@ttelectronics.com | www.ttelectronics.com

Optically Coupled Isolator

OPI120, OPI123



Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Storage Temperature	-55° C to +125° C
Operating Temperature	-55° C to +100° C
Input-to-Output Isolation Voltage ⁽¹⁾⁽²⁾	± 15 kVDC
Lead Soldering Temperature (1/16" (1.6 mm) from case for 5 seconds with soldering iron) ⁽³⁾	260° C
Input Diode	
Forward DC Current ⁽⁴⁾	150 mA
Reverse DC Voltage	3 V
Power Dissipation ⁽⁵⁾	200 mW
Output Photosensor	
Collector-Emitter Voltage OPI120 OPI123	25 V 20 V
Emitter-Collector Voltage	5 V
Collector-Base Voltage OPI120	25 V
Power Dissipation ⁽⁶⁾	250 mW

Notes:

(1) Measured with input and output leads shorted in air with a maximum relative humidity of 50%. If suitably encapsulated or oil-immersed, the isolation voltage is increased to 25 kV minimum.


(2) UL recognition is for 3500 Vrms at 60 Hz

(3) RMA flux is recommended. The duration can be extended to 10 seconds maximum when flow soldering.

(4) Derate linearly 2.0 mA/°C above 25°C.

(5) Derate linearly 2.67 mA/°C above 25°C.

(6) Derate linearly 3.33 mA/°C above 25°C.

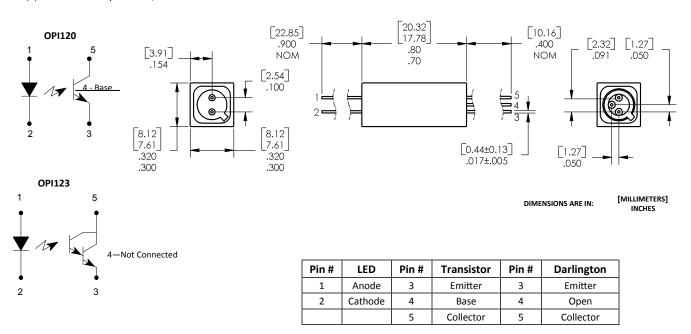

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc. 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200 sensors@ttelectronics.com | www.ttelectronics.com

Optically Coupled Isolator

OPI120, OPI123




SYMBOL	PARAMETER	MIN	ТҮР	MAX	UNITS	TEST CONDITIONS
Input Diode	2					
V _F	Forward Voltage OPI120 OPI123			1.5 1.5	V	I _F = 30 mA I _F = 10 mA
I _R	Reverse Current		-	100	μA	V _R = 3 V
Output Pho	tosensor (See OP236 for additional informa	tion - for r	eference	e only)		·
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage OPI120 OPI123		-		v	I _c = 1 mA I _c = 1 mA
V _{(BR)ECO}	Emitter-Collector Breakdown Voltage	5	-	-	V	I _E = 100 μA
V _{(BR)CBO}	Collector-Base Breakdown Voltage OPI120		-	-	v	I _c = 1 mA
I _{CEO}	Collector-Emitter Dark Current		-	100	nA	V _{CE} = 10 V
Coupled (Se	ee OP804 and OP805 for additional informat	ion - for re	eference	only)		
I _{C/} I _F	DC Current Transfer Ratio OPI120 OPI123		70 -	-	%	I _F = 10 mA, V _{CE} = 5 V I _F = 10 mA, V _{CE} = 2 V
V _{CE(SAT)}	Collector Saturation Voltage OPI120 OPI123	-	-	0.5 1.2	v	I _F = 30 mA, I _C = 1 mA I _F = 5 mA, I _C = 1 mA
I _{C(ON)}	On Collector Current OPI120 OP123	2.0 5.0	-	50 -	mA	I _F = 10 mA, V _{CE} = 5 V I _F = 10 mA, V _{CE} = 2 V
I _{CB(ON)}	On Collector Base Current—OPI120	15	-	-	μΑ	I _F = 30 mA, V _{CB} = 5 V
V _{ISO}	Isolation Voltage ⁽¹⁾	15	-	-	kV	See note 1
t _r , t _f	Output Rise Time, Output Fall Time OPI120 OPI123		2 40	-	μs	See Test Circuit

Notes:

(1) Measured with input and output leads shorted in air with a maximum relative humidity of 50%.

If suitably encapsulated or oil-immersed, the isolation voltage is increased to 25 kV minimum.

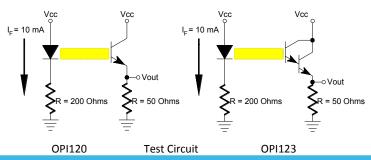

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology, Inc. 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200 sensors@ttelectronics.com | www.ttelectronics.com